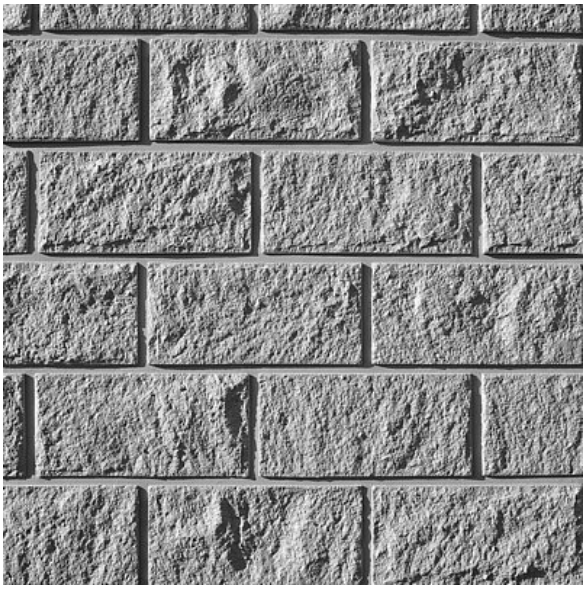


2/128 Hudson

A horizontally running brickwork pattern in a sandstone look. The equally high, square stones are separated by 15 – 20-millimeter wide seams.


Dimensions

Series	Uses	Dimensions (mm)	Ordernumber
C	100	► 2475/2830* × ▲ 2290	C2128
F	50	► 2475/2830* × ▲ 1143	F2128
T	10	► 2475/2830* × ▲ 1143	T2128

100
100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.


50/10
In 10-timer and 50-timer versions, the height is a fixed dimension. The course of the horizontal joint is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

* toothed out

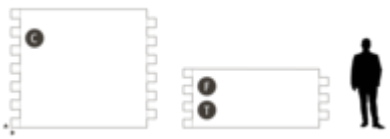

Section Drawing


The drawing illustrates the cross-section of our formliner.

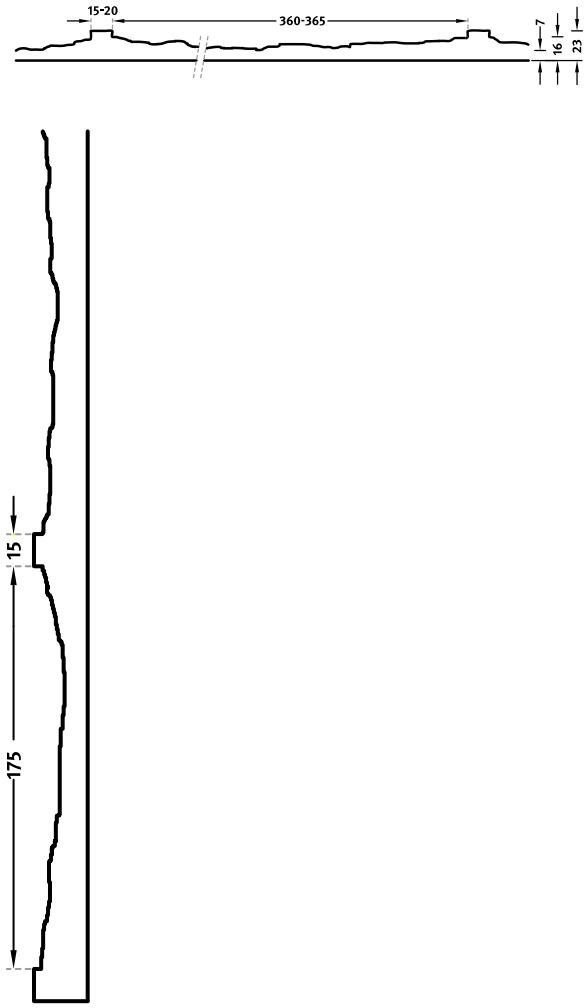

Profile Continuity

Profile continuity is guaranteed at the respective maximum dimensions of the formliner.

Joint lines may occur when sections are joined. Visibility varies depending on the pattern.

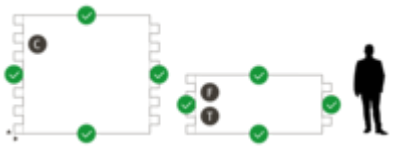

Important note: To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

Material

MATERIAL	RECKLI PUR-Elastomer
TEMPERATURE LIMIT	max. 65 °C
WEIGHT	≈ 21 kg/m²
DIMENSIONAL TOLERANCES	See Formliner Properties page for details

Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com
+49 2323 1706-0

RECKLI GmbH
Industriestraße 36
44628 Herne
Germany