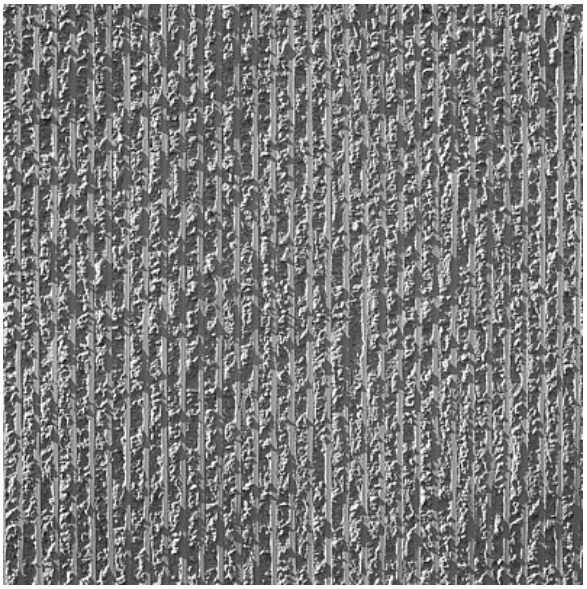


# 2/106 B Amur


Ribs with a coarsely fractured pattern, separated by smooth elevations with a width of 10 millimeters.

## Dimensions

| Series | Uses | Dimensions (mm) | Ordernumber |
|---|---|---|---|
| C | 100 | ▲ 6900 × ► 3800 | C2106 B |
| F | 50 | ▲ 6000 × ► 1000 | F2106 B |


**100**
100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.

**50**
The specified width of the 50-timer formliner is a fixed dimension and ensures the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

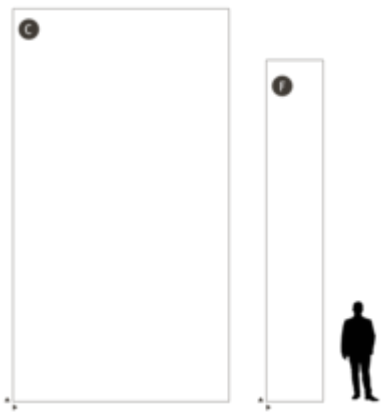

## Section Drawing

The drawing illustrates the cross-section of our formliner.

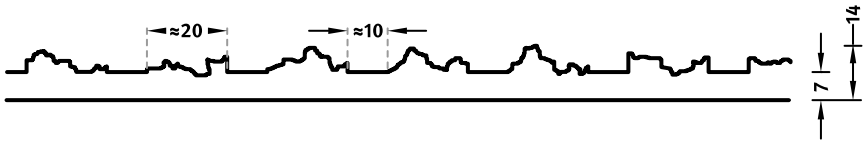


## Profile Continuity

Profile continuity is guaranteed at the respective maximum dimensions of the formliner.

Joint lines may occur when sections are joined. Visibility varies depending on the pattern.



**Important note:** To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

## Material

| | |
|---|---|
| MATERIAL | RECKLI PUR-Elastomer |
| TEMPERATURE LIMIT | max. 65 °C |
| WEIGHT | ≈ 12 kg/m² |
| DIMENSIONAL TOLERANCES | See Formliner Properties page for details |

# Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com
+49 2323 1706-0

**RECKLI GmbH**
Industriestraße 36
44628 Herne
Germany