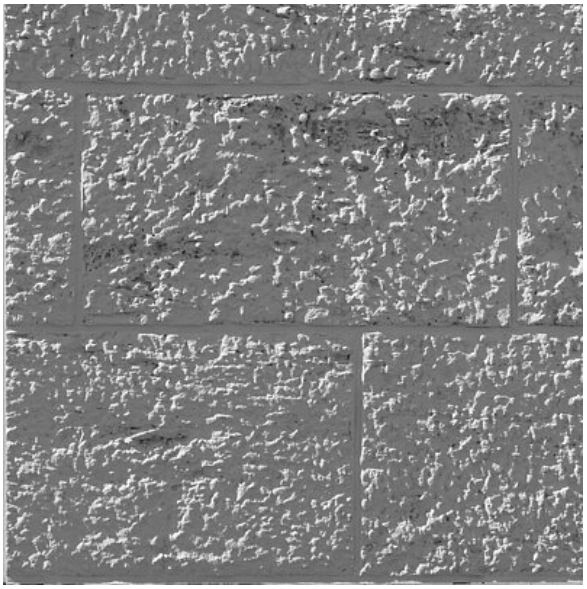


2/250 Duncan

A masonry pattern with a worked and weathered limestone surface. The rectangular stones of the same height are staggered.

Dimensions


Series	Uses	Dimensions (mm)	Ordernumber
C	100	► 3975/4860* × ▲ 3670	C2250
F	50	► 3975/4860* × ▲ 1220	F2250

100
100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.

50
For the 50-timer version, the height is a fixed dimension. The course of the horizontal joint is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

* toothed out

Please note: The drawing shows the formliner, not the concrete view.

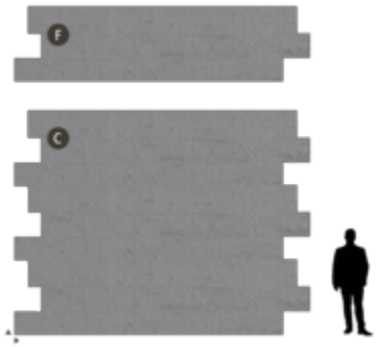

Section Drawing

The drawing illustrates the cross-section of our formliner.






Profile Continuity

Profile continuity is guaranteed at the respective maximum dimensions of the formliner.

Joint lines may occur when sections are joined. Visibility varies depending on the pattern.

Please note: The drawing shows the formliner, not the concrete view.

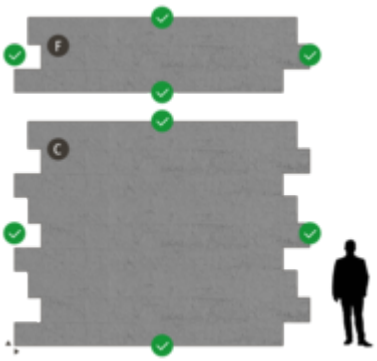

Important note: To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

Material

MATERIAL	RECKLI PUR-Elastomer
TEMPERATURE LIMIT	max. 65 °C

WEIGHT	≈ 20 kg/m²
DIMENSIONAL TOLERANCES	See Formliner Properties page for details

Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com
+49 2323 1706-0

RECKLI GmbH
Industriestraße 36
44628 Herne
Germany