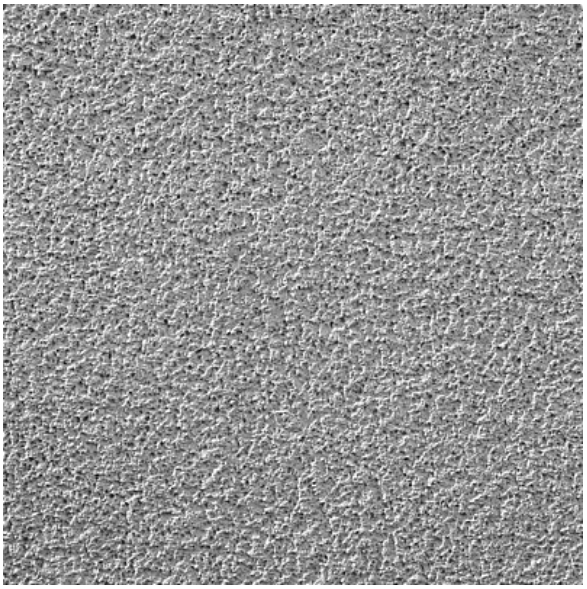


2/76 Nil

A pattern with a surface reminiscent of coarse roughcast. The granulation amounts to 8 millimeters.


Dimensions

Series	Uses	Dimensions (mm)	Ordernumber
C	100	▲ 7000 × ► 3900	C2076
F	50	▲ 6000 × ► 1000	F2076

100
100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.

50
The specified width of the 50-timer formliner is a fixed dimension and ensures the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

coarse roughcast up to 8 mm

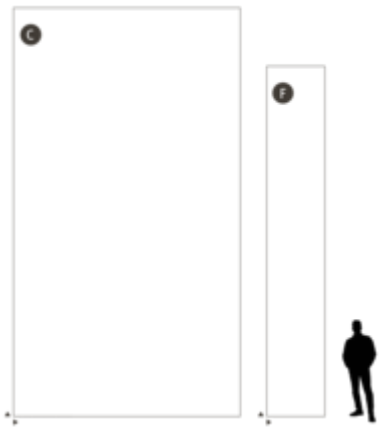


Section Drawing

The drawing illustrates the cross-section of our formliner.



Profile Continuity

No seamless profile continuity.

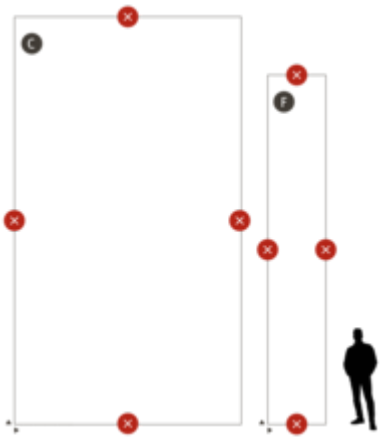

Important note: To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

Material

MATERIAL	RECKLI PUR-Elastomer
TEMPERATURE LIMIT	max. 65 °C
WEIGHT	≈ 11 kg/m²
DIMENSIONAL TOLERANCES	See Formliner Properties page for details

Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com
+49 2323 1706-0

RECKLI GmbH
Industriestraße 36
44628 Herne
Germany