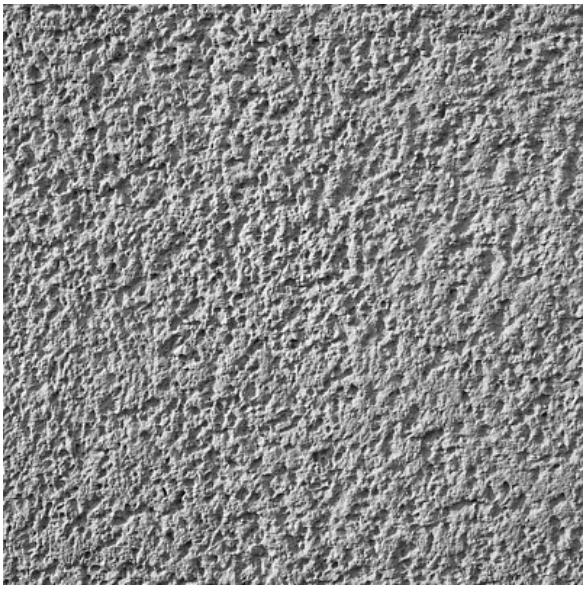


2/69 Marne

A pattern with a surface reminiscent of coarse roughcast. The granulation amounts to 16 millimeters.


Dimensions

Series	Uses	Dimensions (mm)	Ordernumber
C	100	▲ 7800 × ► 3900	C2069
F	50	▲ 6000 × ► 1000	F2069
T	10	▲ 6000 × ► 1000	T2069

100
100-timer formliners are supplied in an individual dimension within the maximum indicated sizes.


50/10
The specified widths of the 10-timer and 50-timer formliners are a fixed dimension and ensure the continuity of the structure in the case of linear patterns. The longitudinal direction of the pattern is variable and can be ordered from 1 m up to the maximum dimension in 10 cm steps.

Coarse roughcast up to 16 mm

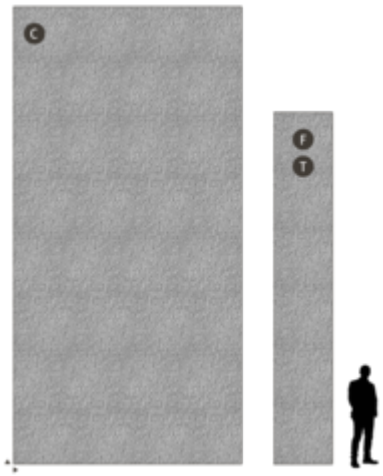


Section Drawing

The drawing illustrates the cross-section of our formliner.

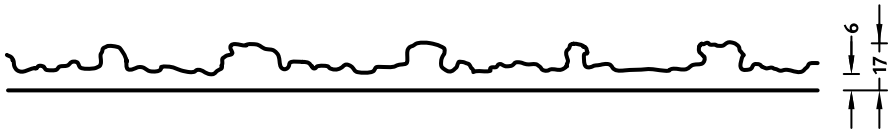

Profile Continuity

No seamless profile continuity.

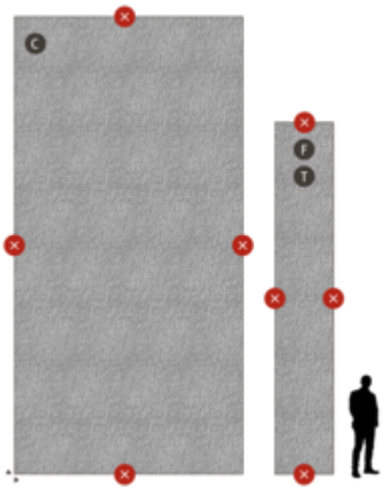

Important note: To guarantee homogeneity of the concrete surface, it is not recommended to mix the series.

Material

MATERIAL	RECKLI PUR-Elastomer
TEMPERATURE LIMIT	max. 65 °C
WEIGHT	≈ 14 kg/m²
DIMENSIONAL TOLERANCES	See Formliner Properties page for details

Contact

Are you an architect, planner or user looking for information materials or personal contact? Would you like to order a sample? We will be happy to respond to your individual inquiry.

info@reckli.com
+49 2323 1706-0

RECKLI GmbH
Industriestraße 36
44628 Herne
Germany